



1200 - 1240mm Brushed Brass/Gold Inline Sliding Shower Screen

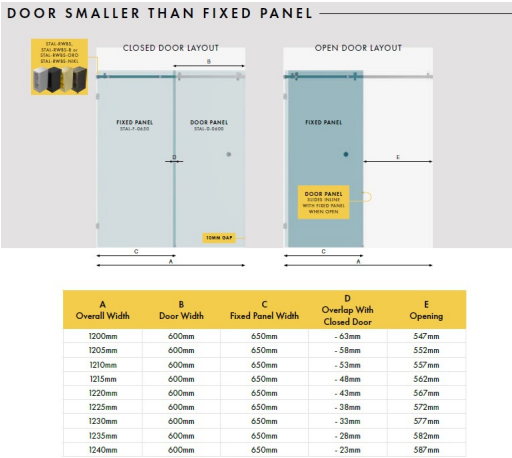

SPACINGS BASED ON THESE ASSUMPTIONS:

1. Fixed panel installed with Purty wall brackets which produces a 3mm silicone join gap. If wall channel is used, specified opening sizes overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).

**When using a 650mm wide fixed panel, it is important to purchase 1x slimline rail bracket separately (STAL-RWBS-/STAL-RWBS-S/STAL-RWBS-ORD/STAL-RWBS-NIK) due to space restrictions between the rail fixing bracket and the wall.*




A Overall Width	B Door Width	C Fixed Panel Width	D Overlap With Closed Door	E Opening
1200mm	600mm	650mm	- 63mm	547mm
1205mm	600mm	650mm	- 58mm	552mm
1210mm	600mm	650mm	- 53mm	557mm
1215mm	600mm	650mm	- 48mm	562mm
1220mm	600mm	650mm	- 43mm	567mm
1225mm	600mm	650mm	- 38mm	572mm
1230mm	600mm	650mm	- 33mm	577mm
1235mm	600mm	650mm	- 28mm	582mm
1240mm	600mm	650mm	- 23mm	587mm

SPACINGS BASED ON THESE ASSUMPTIONS:

1. Fixed panel installed with Purty wall brackets which produces a 3mm silicone join gap. If wall channel is used, specified opening sizes overlaps, etc will change.
2. Edge of glass door must remain 10mm from wall. 10mm door bulb recommended to use for buffering or if not used, 10mm safety margin gap required.
3. When door is open, minimum 15mm gap is required from wall (for safety margin buffering).

**When using a 650mm wide fixed panel, it is important to purchase 1x slimline rail bracket separately (STAL-RWBS-/STAL-RWBS-S/STAL-RWBS-ORD/STAL-RWBS-NIK) due to space restrictions between the rail fixing bracket and the wall.*

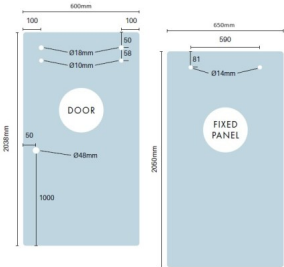

1.5MM THICK



Suits Wall to Wall Opening of: 1200mm to 1240mm

Kit includes

- 1 x 600mm x 2038mm Door Panel
- 1 x 650mm x 2050mm Fixed Panel
- 1 x Brushed Brass/Gold Sliding Door Kit
- 2 x Brushed Brass/Gold Wall Brackets
- 1 x Door Bump Stop
- 1 x Brushed Brass/Gold 1650mm Long Pre-Drilled Rail
- 1 x Brushed Brass/Gold Slimline Rail Wall Bracket
- 1 x 20 Pack of 1.5mm Clear Setting Blocks
- 1 x Bostik 6s Silicon
- 1 x Ultraloc Threadlocker 3242 Compound

1200 - 1240mm Brushed Brass/Gold Inline Sliding Shower Screen

[Click Here to View or Sliding Shower Screen Full Brochure](#)

[Click Here to View or Sliding Shower Screen Installation Guide](#)

Rating: Not Rated Yet

Price

\$842.00

\$842.00

[Ask a question about this product](#)

Description

Suits Wall to Wall Opening of: 1200mm to 1240mm

Kit includes

- 1 x 600mm x 2038mm Door Panel
- 1 x 650mm x 2050mm Fixed Panel
- 1 x Brushed Brass/Gold Sliding Door Kit
- 2 x Brushed Brass/Gold Wall Brackets
- 1 x Door Bump Stop
- 1 x Brushed Brass/Gold 1650mm Long Pre-Drilled Rail
- 1 x Brushed Brass/Gold Slimline Rail Wall Bracket
- 1 x 20 Pack of 1.5mm Clear Setting Blocks
- 1 x Bostik 6s Silicon
- 1 x Ultraloc Threadlocker 3242 Compound

[Click Here to View or Sliding Shower Screen Full Brochure](#)

[Click Here to View or Sliding Shower Screen Installation Guide](#)